

# PowerStak<sup>®</sup>

## Powered Walkie Stackers



**Presto**<sup>LIFTS</sup> **ECO A**

# The PowerStak<sup>®</sup> Difference

The Presto PowerStak<sup>®</sup> line of high performance, fully powered stackers offers significant performance advantages over manual stackers without a notable price premium. PowerStak Stackers provide flexibility and versatility. Whether used as a dedicated stacker, a combination stacker/work positioner, or as a transporter, these machines are designed with ergonomic features that help improve worker productivity.

Their sleek, stylish design, low overall weight, and quiet operation work well in a variety of environments including warehouses, loading docks, light assembly work cells, retail sales floors, and more.

PowerStak  
Fork-Over  
Narrow Mast




PowerStak  
Adjustable Straddle  
Narrow Mast




PowerStak  
Adjustable Straddle  
Telescoping Mast



Class 2 adjustable fork carriage with forged forks



Ergonomic handle with pin code access and battery discharge indicator.



Auto-reversing "belly bump" switch protects operator. Dual lift/lower controls and horn access are all within easy reach.




Turtle speed setting reduces drive speed by 50% for precise positioning.



Tight turning radius allows PowerStak to operate in significantly narrower aisles than conventional forklift trucks.



Features AC controller with CAN Bus system.



Sealed absorbed glass mat (AGM) deep cycle batteries are standard.



Solid steel straddle legs provide rigidity and eliminate deflection even under maximum load conditions.

## Straddle Design



Model	PPS2600-62NAS	PPS2600-101AS	PPS2600-125AS
Lift Height (lowered/raised)	2.75" / 62"	2.75" / 101"	2.75" / 125"
Capacity	2,600 lbs.	2,600 lbs.	2,600 lbs.
Load Center	24"	24"	24"
Fork (one piece forged)	42" L x 4" W	42" L x 4" W	42" L x 4" W
Class 2 Carriage	Fork Locking Pin	Fork Locking Pin	Fork Locking Pin
Straddle I.D. (adjustable)	40" - 50"	40" - 50"	40" - 50"
Overall Width (base O.D.)	48" - 58"	48" - 58"	48" - 58"
Overall Height (lowered/raised)	79" / 79"	73" / 123"	85" / 147"
Weight	1,340 lbs.	1,585 lbs.	1,630 lbs.
Max. Travel Speed (unloaded/loaded)	3.6 / 3.4 MPH	3.6 / 3.4 MPH	3.6 / 3.4 MPH
Turning Radius	54"	58"	58"
Drive Motor	1000 Watt AC	1000 Watt AC	1000 Watt AC
Battery (2)	AGM-12V 75 amp hr	AGM-12V 75 amp hr	AGM-12V 75 amp hr



PPS2600-62 NAS and NFO models feature a narrow mast design which provides excellent operator visibility.




NAS an AS Models feature adjustable straddle bases with inside dimension of 40" to 50" and forged forks.

## Fork Over Design



Model	PPS2600-62NFO-21	PPS2600-62NFO-27
Lift Height (lowered/raised)	3.5" / 62"	3.5" / 62"
Capacity	2,600 lbs.	2,600 lbs.
Load Center	24"	24"
Fork Length	42"	42"
Individual Fork Width	6"	6"
Max. Distance Between Forks	9"	15"
Max. Overall Width of Forks	21"	27"
Overall Height	78"	78"
Overall Width	32"	32"
Weight	1,080 lbs.	1,080 lbs.
Max. Travel Speed (unloaded/loaded)	3.6 / 3.4 MPH	3.6 / 3.4 MPH
Turning Radius	53"	53"
Drive Motor	1000 Watt AC	1000 Watt AC
Battery (2)	AGM-12V 75 amp hr	AGM-12V 75 amp hr

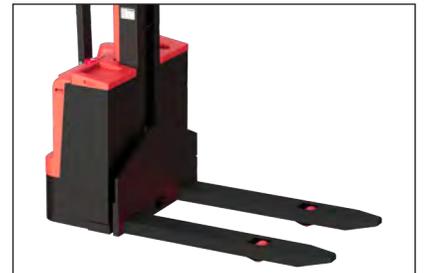

Fork over design (NFO) with fixed legs and forks. For use with open bottom pallets or skids only.



PPS2600-101AS and PPS2600-125AS models are equipped with a two stage telescoping mast.

## Options

PowerStak units are available with these standard options. Other options may be available, however, not all options shown are available for every PowerStak model. Please contact Presto Lifts for details.

**Load Backrests** - 36" and 48" high, to help stabilize taller loads.

**High-Traction Rubber Drive Wheel** - for use on epoxy floors or any application requiring more traction.

**Factory Set Travel Speed** - Specify maximum travel speed from 1.2 to 3 MPH.

**Adjustable Fork Lowering Speed** - Adjustable control mounded on inside of cabinet.

**LiFePO<sub>4</sub>, Lithium Iron Phosphate Battery** - With battery management system and quick charge feature.

## Other Presto Stackers



Lift Stik Lifter  
Tranporter



Lift Stik  
Compact



Lift Stik  
Adjustable Base



Manual  
Stackers



Battery  
Stackers



Pallet  
Stackers




Specialty  
Stackers



Counterweight  
Stackers

## The PowerStak Warranty

Items such as batteries, wheels, motor brushes, seals, bearings, hydraulic hoses, all switches, battery chargers and forks have a limited warranty against defects in faulty material and workmanship for a ninety (90) day period from the date of invoice and 30-day limited warranty on labor. Please note that prior authorization from Presto Lifts is required on all warranty work.



Dealer Imprint